


JHFB Series

Control Button Boxes



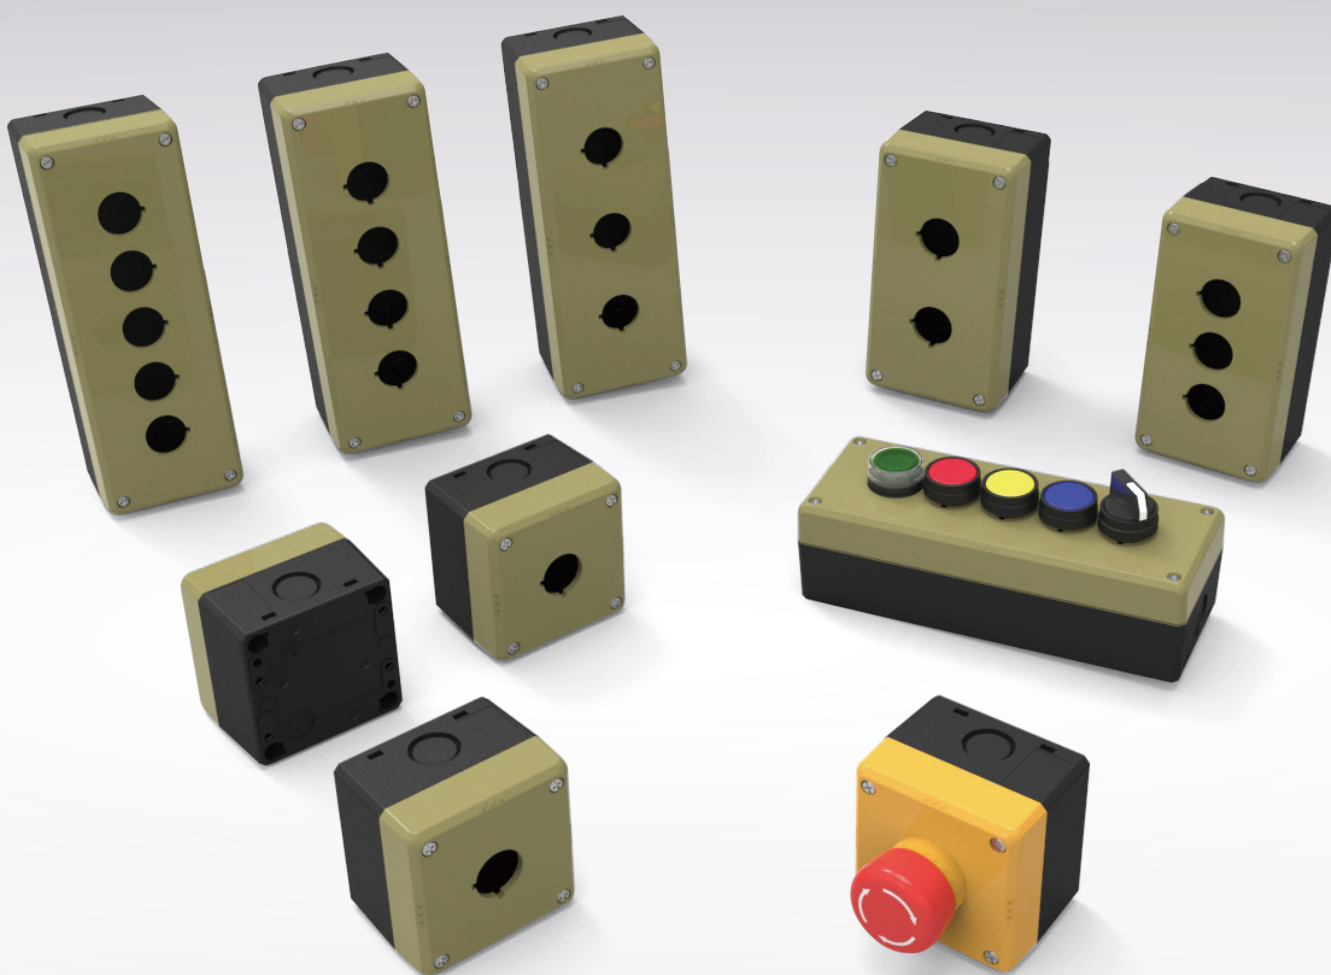

- 保护等级为IP65的轻量树脂控制箱。
- 开孔型可以安装 22系列的控制元器件。
- 无孔型可以在内部安装端子台，作为中转控制箱。
- 另备有紧急停止用的黄色外壳型，以及可使安装在面板的控制元器件接线部，保护等级为IP65的触点块保护型控制箱。(仅76mm型)

- Lightweight resin control box with IP65 protection rating.
- The open-hole version can be fitted with Ø22 series control components.
- The non-porous type can be installed inside the terminal block as a relay control box.
- A yellow housing type for emergency stop and a contact block protection type control box with a protection level of IP65 that can be mounted on the control unit of the panel are available. (76mm type only)

技术参数 Technical Data


一般性能 General Data

安全标准	Operating Temperature	<ul style="list-style-type: none"> - IEC/EN60529 - UL508 - UL50 - CSA C22.2 No.14 - CSA C22.2 No.94
标准使用条件	Standard Conditions	<ul style="list-style-type: none"> - 使用环境温度 -25~+60℃(无结冰) - 相对湿度 45~85%RH(无结露) - 保存环境温度 -40~+80℃(无结冰) - 使用环境 污染等级3
保护等级	Protection Level	IP65/IP67(仅限与对应机型配套时) NEMA J Series Use Only can be Reach IP67 NEMA HQ/SD/SS Series can be Reach IP65
触电保护等级	Electric Shock Protection Level	Class II(□ □ □ □ □ □ □ □)
材料	Material	<ul style="list-style-type: none"> - 箱盖/箱底: ABS - 箱盖安装螺丝: 低碳钢镀镍
对应型号	Corresponding Type	<ul style="list-style-type: none"> - HQ22/SD22/SS22 - 金属系列J22
重量(约)	Weight (about)	<ul style="list-style-type: none"> - 76mm□ 110g(FB1W-111Z□ □ □) - 140mm□ 164g(FB2W-211Z□ □ □) - 200mm□ 213g(FB3W-311Z□ □ □)

JHFB Series

Control Button Boxes





组合方式 Combination Mode

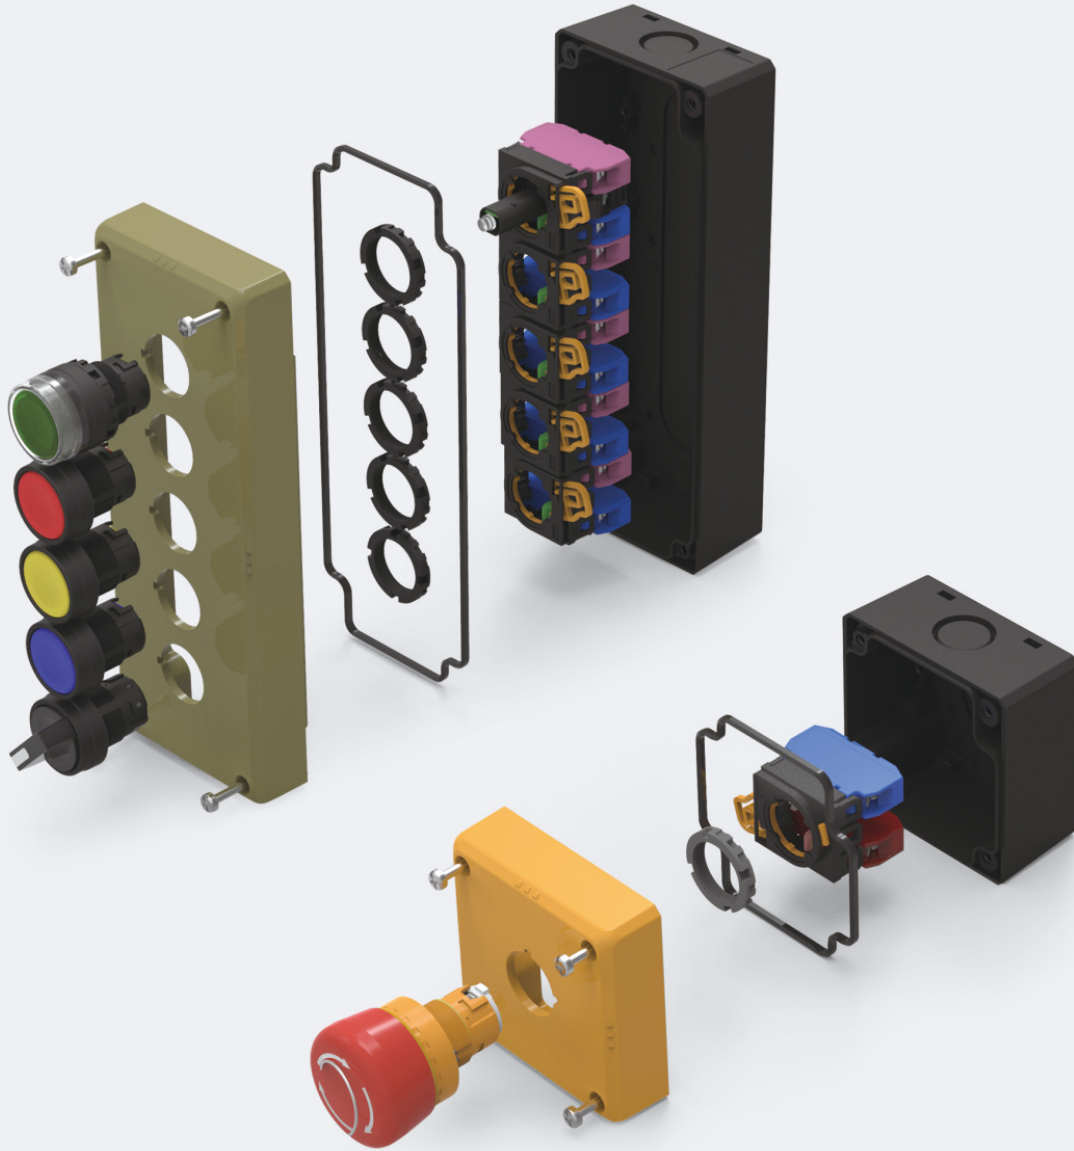





外形尺寸图 Dimensions

(单位unit: mm)





JHFB-1PY

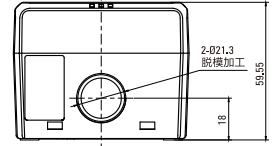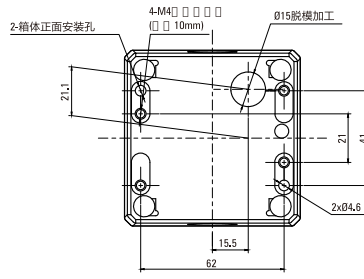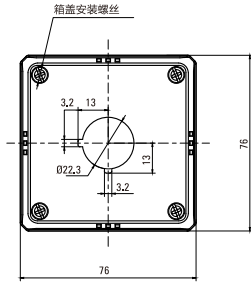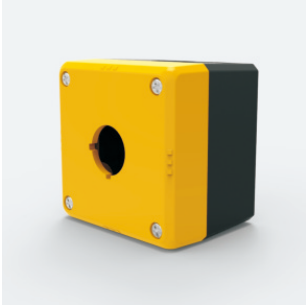




JHFB-1PG

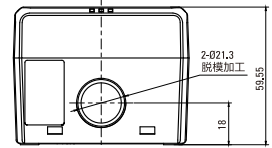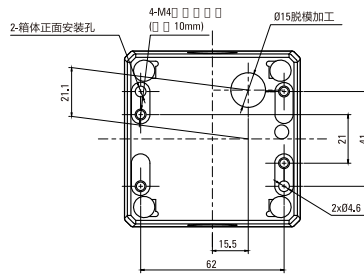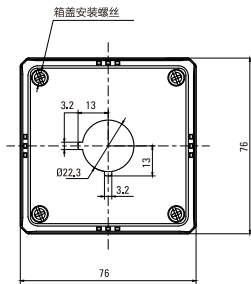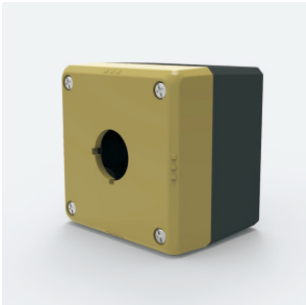

JHFB-2PG

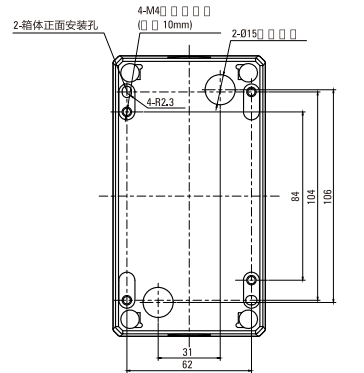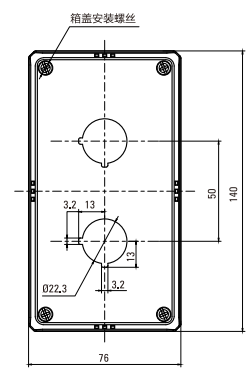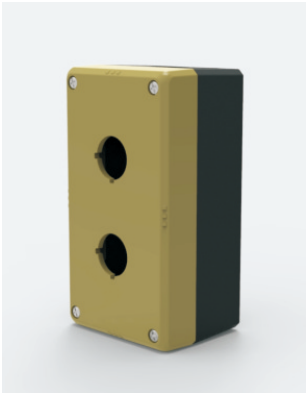

JHFB-3PG

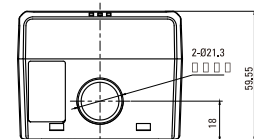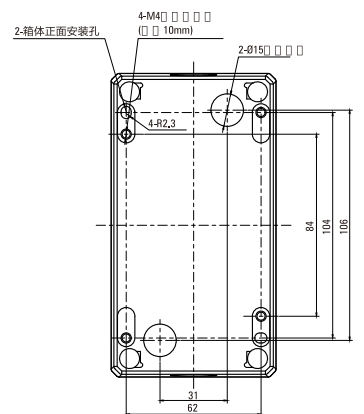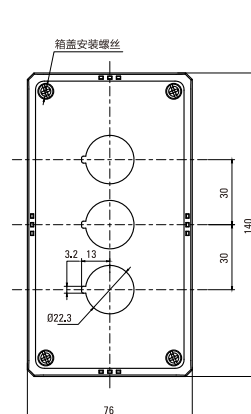




JHFB Series

Control Button Boxes




外形尺寸图 Dimensions

(单位unit: mm)

JHFB-3HG

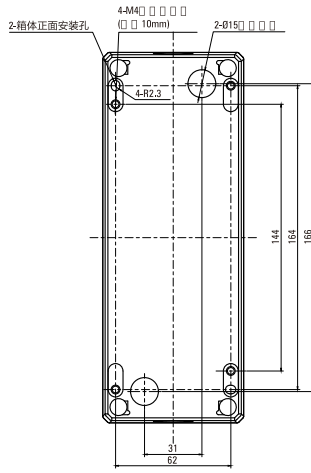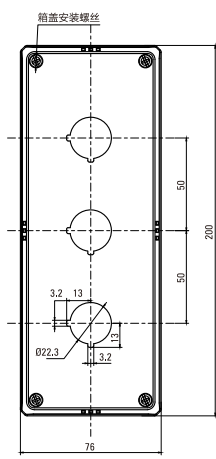

JHFB-4PG

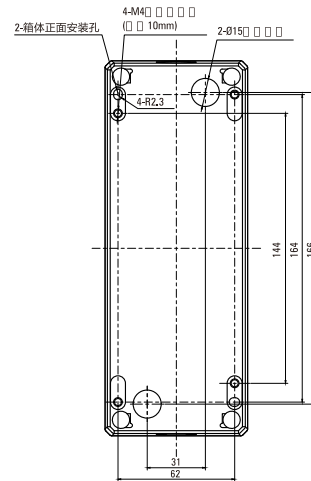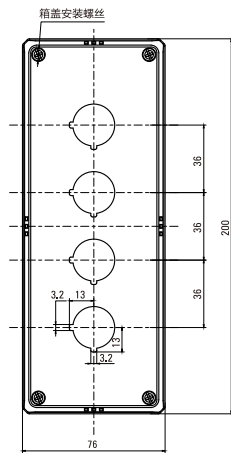

JHFB-5PG

